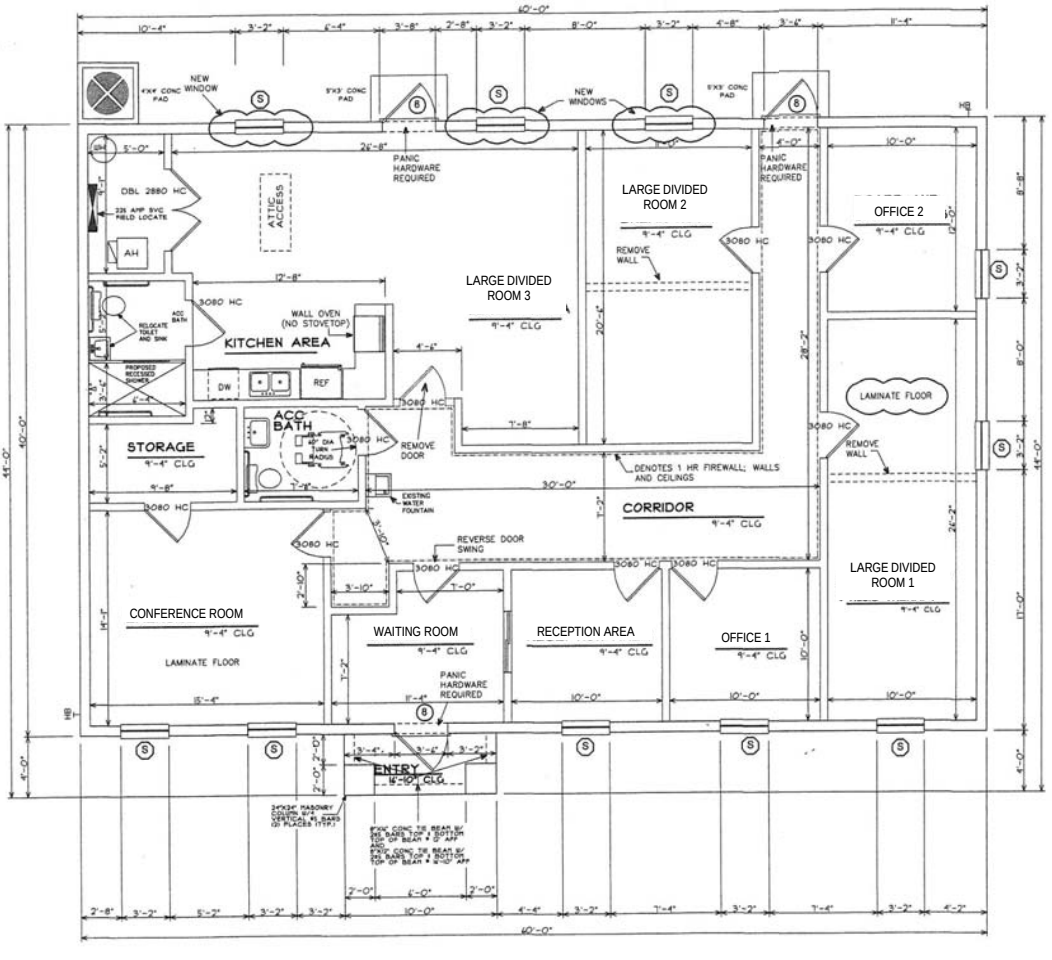

60'-0"
NEW WINDOW
4'X4' CONC PAD
5'X3' CONC PAD
NEW WINDOWS
PANIC HARDWARE REQUIRED
DBL 2880 HC
225 AMP 8VC FIELD LOCATE
AH
ATTIC ACCESS
LARGE DIVIDED ROOM 2
9'-4" CLG
OFFICE 2
9'-4" CLG
REMOVE WALL
LARGE DIVIDED ROOM 3
9'-4" CLG
3080 HC
ACC BATH
RELOCATE TOILET AND SINK
WALL OVEN (NO STOVETOP)
KITCHEN AREA
PROPOSED RECESSED SHOWER
DW
REF
ACC BATH
40" DIA TURN RADIUS
REMOVE DOOR
LAMINATE FLOOR
STORAGE
9'-4" CLG
DENOTES 1 HR FIREWALL; WALLS AND CEILINGS
EXISTING WATER FOUNTAIN
CORRIDOR
9'-4" CLG
REVERSE DOOR SWING
LARGE DIVIDED ROOM 1
9'-4" CLG
CONFERENCE ROOM
9'-4" CLG
LAMINATE FLOOR
WAITING ROOM
9'-4" CLG
RECEPTION AREA
9'-4" CLG
OFFICE 1
9'-4" CLG
PANIC HARDWARE REQUIRED
ENTRY
16'-10" CLG
24"X24" MASONRY COLUMN W/4 VERTICAL #5 BARS (2) PLACES (TYP.)
8"X16" CONC TIE BEAM W/ 2#5 BARS TOP & BOTTOM TOP OF BEAM @ 0" AFF AND
8"X20" CONC TIE BEAM W/ 2#5 BARS TOP & BOTTOM TOP OF BEAM @ 16'-10" AFF
44'-0"
40'-0"